


# Encore GLP20r30

## Technical Data Sheet



**GLP r30 - Printable Shrink, Clear Biaxially Oriented Polypropylene Film with Chemically Recycled Plastic Waste Sourced PP Resin for Tobacco Overwrap Applications. .**

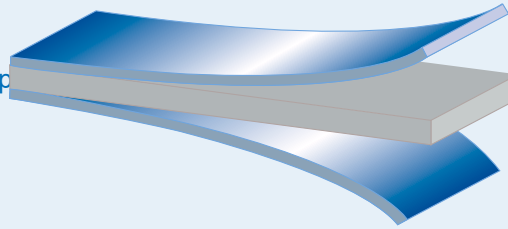

- High Slip Sealable Layer
- Oriented Polypropylene Blend
- Corona Treated Low Slip Sealable Layer

### Technical Features

- Printable one side
- Superior controlled, balanced shrinkage
- Enhanced machine performance
- Satisfies requirements for vending blocking applications
- Excellent moisture and flavour barrier
- Differential slip properties for tight wraps
- Overcomes film relaxation problems
- Resistant to solvent attack

### Sustainable Features

- 30% recycled content
- ISCC certified on a mass balance basis
- Contributing to a circular economy
- Contributes to reducing the use of fossil resources

### Applications

GLP r30 is suitable for use in the tobacco industry for both high speed overwrapping of printed packs and display outers where exceptional pack appearances and wrap tightness are required.



### Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	GLP r30
Thickness	Innovia Films test		micron	20
			gauge	80
Yield	Innovia Films test		m <sup>2</sup> /kg	54.9
			in <sup>2</sup> /lb	38600
			g/m <sup>2</sup>	18.2
Permeability to: Water vapour	ASTM F 1249	38°C 90% RH 100°F 90% RH	g/m <sup>2</sup> .24 hrs	6.0
			g/100in <sup>2</sup> . 24 hrs	0.39
Oxygen	ASTM F 1927	23°C 0% RH 73°F 0% RH	cc/m <sup>2</sup> .24 hrs	1500
			cc/100in <sup>2</sup> . 24 hrs	97
Optical: Gloss	ASTM D 2457	20°	units	130
			Haze (wide angle)	1.3
Coefficient of friction (film to film)	ASTM D 1894	Static/ Dynamic		0.40
				0.30
Blocking	Innovia Films test	70°C (158°F) / 200g / 2hrs	N	6
Tensile strength	ASTM D 882	Strain rate 50% / min	MN/m <sup>2</sup> MD	170
			TD	210
			lb/in <sup>2</sup> MD	24700
			TD	30500
Elongation at break	ASTM D 882	Strain rate 50% / min	% MD	120
			TD	80
Elasticity modulus (1% secant)	ASTM D 882	Strain rate 10% / min	MN/m <sup>2</sup> MD	3000
			TD	3600
			lb/in <sup>2</sup> MD	435100
			TD	522100
Sealing range	Innovia Films test	2 secs; 0.10MN/m <sup>2</sup> 2 secs; 15 psi	°C	110-140
			°F	230-285
Seal strength	Innovia Films test	109°C; 2 secs; 0.10MN/m <sup>2</sup> 225°F; 2 secs; 15 psi	g(f)/25mm/ in	480
Shrinkage	Innovia Films test	60 secs at 80°C (176°F) 60 secs at 120°C (248°F)	% MD	3.7
			TD	3.5
			MD	7.0
			TD	11.0

MD Machine Direction TD Transverse Direction  
All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH, (73 ± 4F, 50 ± 5% RH), unless otherwise stated. Where relevant, tests are based on international testing standards.

Ref GLP r30 - 1 of 2 - 0222

# Encore GLP20r30

## Technical Data Sheet



### Reel Specifications

#### Nominal Reel Diameters

Film	12x Length (metres)
GLT20r30	22800

Film	12x Length (feet)
GLT80r30	74803

Other reel lengths are available subject to negotiation.

Outside Diameter	2x	4x	6x	8x	12x
For 77mm / 3in core	-	450mm 18¼in	-	-	-
For 153mm / 6in core	-	475mm 19in	570mm 22¼in	650mm 26in	785mm 32in

### Film Winding/Discharge Treatment

Discharge treatment is available on either the inner or outer surface of Encore GLP r30. The treated surface is identified by a symbol on a label as below.

Treated Surface	Ordering Code	Label Symbol
Inside	I	
Outside	O	

\*For printing application consult an Innovia Films Technical Representative

### Film Storage and Handling

No special conditions are required for the storage of Encore GLP r30 but it is recommended that dry conditions at temperatures below 30°C (86°F) are employed. Encore GLP r30 is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use.

### Food Contact

Encore GLP r30 complies with the applicable EU and US legislation for most applications involving direct contact with foods. Full details are given on the Declaration of Compliance. Customers intending to use Encore GLP r30 in a food contact application should request a copy of this document from Innovia Films. Details of compliance with food contact legislation in non-EU countries are also available upon request.

### Health & Safety Guidelines

For Health & Safety information, please refer to literature reference B190.

**Disclaimer:** Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

Ref GLP r30- 2 of 2 - 0222

#### Regional Offices:

Europe (UK) Tel +44 16973 42281  
Americas (USA) Tel +1 800 424 6273  
Asia-Pacific (Aus) Tel +61 3 9303 0600

[www.innoviafilms.com](http://www.innoviafilms.com)  
email: [tobacco@innoviafilms.com](mailto:tobacco@innoviafilms.com)  
™Trademark of Innovia Films

