


Propacast™ KB

Technical Data Sheet

KB - Transparent polypropylene cast (CPP) film with sealable layers, with good tear and puncture resistance

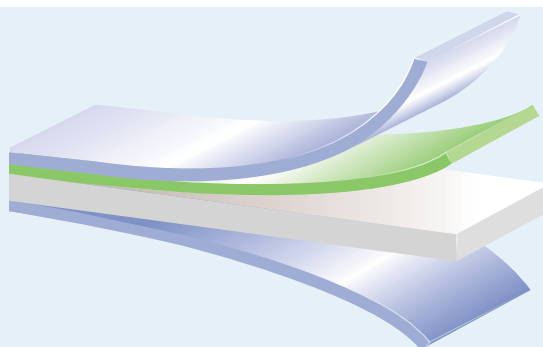

- Treated Heat Sealable Layer
- Functional Interlayer
- Transparent Core
- Non Treated Heat Sealable Layer

Features

- One side corona treated (outer side of the reel)
- Excellent sealability
- Perfect mechanical and optical properties
- High tear and puncture resistance
- Low water vapour and odour permeability
- Available version of film: summer and winter

Applications

- Special packaging material for bread
- Flexographic and rotogravure printing
- Foodstuff products packaging on high-speed packaging machines

Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	KB				
Thickness	ISO 4593		micron	20-24	25-30	31-37	38-49	50-60
Yield Unit weight	ISO 536		m ² /kg g/m ²	55.56-46.30 18.00-21.60	44.44-37.04 22.50-27.00	35.84-30.03 27.90-33.30	29.24-22.68 34.20-44.10	22.22-18.52 45.00-54.00
Density	ISO 845		g/cm ³	0.90				
Haze (wide angle)	ASTM D 1003	2.5°	%	2.7	2.7	2.7	2.9	2.9
Gloss	ASTM D 2457	45°	GU	97				
Coefficient of friction (inner/inner)	ISO 8295	Dynamic		0.20				
Corona treatment	ISO 8296		mN/m (dyne)	36				
Tensile Strength	ISO 527-1,-3		N/mm ²	MD 70 35	TD 75 35	75 35	75 40	75 40
Elongation at break	ISO 527-1,-3		%	MD 650 800	TD 700 870	770 900	820 930	850 960
Heat seal strength (inner/inner)	Innovia Films test	1"; 150N; 130°C	N/15mm	4.0	5.0	5.5	7.0	8.0
Sealing range*	Innovia Films test	1"; 150N; 130°C	°C	120-150				

*The selection of sealing temperatures depends on the characteristic of heat sealing bars and packaging process speed.

MD Machine Direction TD Transverse Direction

All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH, unless otherwise stated. Where relevant, tests are based on international testing standards.

Propacast™ KB - 1 of 2 - 0720

Propacast™ KB

Technical Data Sheet

Reel Specifications

Nominal Reel Diameters

Film	Outside Diameter 570mm (metres) - core 76mm	Outside Diameter 570mm (metres) - core 152mm	Outside Diameter 770mm (metres) - core 152mm
KB 20-24	10800 - 9000	10500 - 8700	21300 - 17700
KB 25-30	8600 - 7200	8400 - 7000	17000 - 14200
KB 31-37	7000 - 5800	6800 - 5700	13700 - 11500
KB 38-49	5700 - 5400	5500 - 5300	11200 - 10700
KB 50-60	4300 - 3600	4200 - 3500	8500 - 7100

ns= non standard.

Other reel lengths are available subject to negotiation.

Reel Labelling

Different films have various special surfaces; these are indicated on the reel labels.

Film Storage and Handling

Recommended processing conditions: 15-35°C, humidity below 75% RH. Before processing it is recommended to season the film in the processing conditions at temperature 20°C for a minimum of 24 hours.

In case of transporting or storing the film:

- below +15°C or above +35°C seasoning time should be extended to 48 hours;
- below + 5°C or above +40°C seasoning time should be extended to 72 hours.

Compliance with the above guarantees correct film processing.

Food Contact

Propacast™ KB complies with the applicable EU legislation for most applications involving direct contact with foods. Full details are given on the Declaration of Compliance. Customers intending to use Propacast™ KB in a food contact application should request a copy of this document from Innovia Films. Details of compliance with food contact legislation in non-EU countries are also available upon request.

Health & Safety Guidelines

For Health & Safety information, please refer to Innovia Poland's Quality documents.

Disclaimer: Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

Propacast™ KB - 2 of 2 - 0720

Regional Offices:

Europe (UK) Tel +44 16973 42281

Americas (USA) Tel +1 800 424 6273

Asia-Pacific (Aus) Tel +61 3 9303 0600

www.innoviafilms.com

email: packaging@innoviafilms.com

™ Trademark of Innovia Films

