


Propafilm™ SRC



Technical Data Sheet

SRC - Shrink Tightening Acrylic Coated Film.

Biaxially oriented polypropylene (BOPP) film coated on both sides with an aqueous acrylic (chlorine free) dispersion.

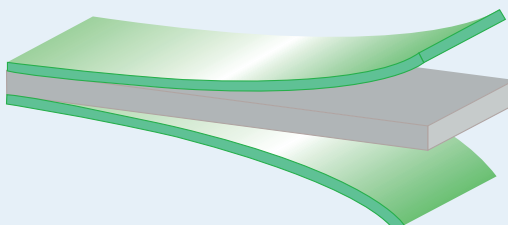

- Acrylic Coating
- Shrink Tightening Oriented Polypropylene
- Acrylic Coating

Features

- Superior controlled, balanced shrinkage
- Excellent barrier to water vapor, flavors and aromas
- Low sealing threshold and broad sealing range on both sides
- Both sides of the film are receptive to inks, adhesives and tear-tapes
- Superior optical properties
- Overcomes film relaxation problems

Applications

SRC24(95) is suitable for use as a clear/naked collation carton or bundle overwrap where exceptional appearance, aroma barrier and wrap tightness are required.



Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	SRC	
Thickness	Innovia Films test		micron	24	
			gauge	95	
Yield	Innovia Films test		m ² /kg	45.6	
			in ² /lb	32100	
			g/m ²	21.9	
Permeability to: Water vapour	ASTM F 1249	38°C 90% RH 100°F 90% RH	g/m ² .24 hrs	5.4	
			g/100in ² . 24 hrs	0.35	
Oxygen	ASTM F 1927	23°C 0% RH 73°F 0% RH	cc/m ² .24 hrs	850	
			cc/100in ² . 24 hrs	55	
Optical: Gloss	ASTM D 2457	45°	units	90	
Haze (wide angle)	ASTM D 1003	2.5°	%	2.0-2.5	
Coefficient of friction (out to out)	ASTM D 1894	Static/ Dynamic		0.20-0.30	
				0.20-0.30	
Sealing range	Innovia Films test	2 secs; 0.10MN/m ² 2 secs; 15 psi	°C	85-140	
			°F	185-285	
Seal strength	Innovia Films test	130°C; 2 secs; 0.10MN/m ² 265°F; 2 secs; 15 psi	g(f)/25mm/ in	>400	
Shrinkage	Innovia Films test	60 secs at 80°C (176°F) 60 secs at 120°C (248°F)	%	MD	1.5
				TD	1.0
				MD	6.0
				TD	9.0

MD Machine Direction TD Transverse Direction

All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH, (73 ± 4°F, 50 ± 5% RH), unless otherwise stated. Where relevant, tests are based on international testing standards.

Ref B298 - 1 of 2 - Q222

Propafilm™ SRC

Technical Data Sheet

Reel Specifications

Nominal Reel Diameters

Film	2x Length (metres)
SRC24	3100

Film	2x Length (feet)
SRC95	10170

Our preferred reel length is 2x. Other reel lengths are available on request.

Outside Diameter	2x
For 77mm / 3in core	330mm 13in

Film Storage and Handling

The low heat-seal threshold and wide seal range of Propafilm™ SRC film allows its use in particularly demanding packaging machine applications. Care should therefore be taken to protect reels of film from storage temperatures above 30°C (85°F) and localised sources of heat above 45°C (115°F). Reels of Propafilm™ SRC should be protected from high levels of moisture and accidental water splashes at all times. The reels should remain in the protective coverings supplied until ready for use on converting or packaging machinery. Converted reels, in both master and slit reel form should be similarly protected at all times. Propafilm™ SRC is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use.

Food Contact

Propafilm™ SRC complies with the applicable EU and US legislation for most applications involving direct contact with foods. Full details are given on the Declaration of Compliance. Customers intending to use Propafilm™ SRC in a food contact application should request a copy of this document from Innovia Films. Details of compliance with food contact legislation in non-EU countries are also available upon request.

Health & Safety Guidelines

For Health & Safety information, please refer to literature reference B190.

Disclaimer: Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

Ref B298 – 2 of 2 – 0222

Regional Offices:

Europe (UK) Tel +44 16973 42281
Americas (USA) Tel +1 800 424 6273
Asia-Pacific (Aus) Tel +61 3 9303 0600

www.innoviafilms.com
email: packaging@innoviafilms.com
™ Trademark of Innovia Films

