


# Propafilm™ BH

## Technical Data Sheet

**BH** - Metallised biaxially oriented polypropylene film, heat sealable (non-metallised side), increased barrier, one side corona treated

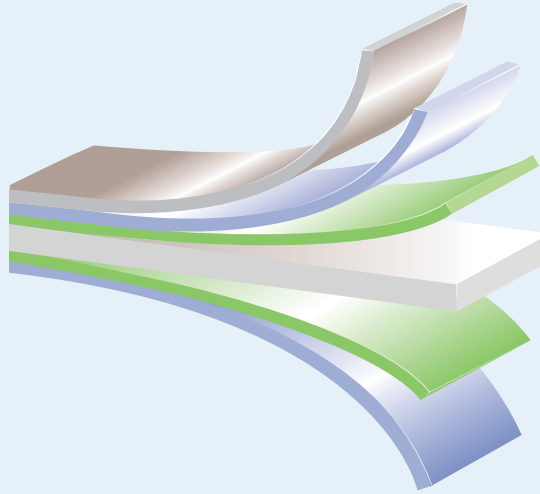


- Vacuum Deposited Aluminium
- Treated Metal Receptive Layer
- Transparent OPP Interlayer
- Transparent OPP Core
- Transparent OPP Interlayer
- Non Treated Heat Sealable Layer

### Features

- One side corona treated (outer side of the reel – metallised side)
- High light barrier properties
- High water vapour and aroma barrier properties

### Applications

- For lamination on the metallised side (i.e. chips, snacks packaging)
- For printing on the metallised side for packaging (ice creams, chocolate products, cookies etc.)

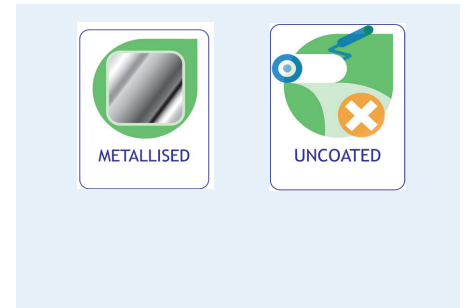

### Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	BH
Thickness	ISO 4593		micron	20
Yield Unit weight	ISO 536		m <sup>2</sup> /kg g/m <sup>2</sup>	55.56 18.00
Permeability to: Water vapour	ASTM F 1249	38°C 90% RH	g/m <sup>2</sup> .24 hrs	0.20
Oxygen	ASTM F 1927	23°C 0% RH	cc/m <sup>2</sup> .24 hrs	40
Density	ISO 845		g/cm <sup>3</sup>	0.90
Aluminium adhesion to film	Innovia Films test			5.0
Coefficient of friction (inner/inner)	ISO 8295	Dynamic		0.35
Tensile Strength	ISO 527-1,-3		N/mm <sup>2</sup> MD TD	140 280
Elongation at break	ISO 527-1,-3		% MD TD	180 55
Thermal shrinkage	Innovia Films test	120°C, 5'	% MD TD	6.0 3.0
Sealing range*	Innovia Films test	1"; 150N; 130°C	°C	105-140
Optical Density	Innovia Films test			2.5

\*The selection of sealing temperatures depends on the characteristic of heat sealing bars and packaging process speed.

MD Machine Direction TD Transverse Direction  
All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH, unless otherwise stated. Where relevant, tests are based on international testing standards.

Propafilm™ BH - 1 of 2 - 0620

# Propafilm™ BH

## Technical Data Sheet

### Reel Specifications

#### Nominal Reel Diameters

Film	Outside Diameter 570mm (metres) - core 152mm	Outside Diameter 770mm (metres) - core 152mm	Outside Diameter 980mm (metres) - core 152mm
BH20	11250	21200	34950

ns= non standard.

Other reel lengths are available subject to negotiation.

### Reel Labelling

Different films have various special surfaces; these are indicated on the reel labels.

### Film Storage and Handling

Recommended processing conditions: 15-35°C, humidity below 75% RH. Before processing it is recommended to season the film in the processing conditions at temperature 20°C for a minimum of 24 hours.

In case of transporting or storing the film:

- below +15°C or above +35°C seasoning time should be extended to 48 hours;
- below + 5°C or above +40°C seasoning time should be extended to 72 hours.

**Compliance with the above guarantees correct film processing.**

The suitability for printing and lamination is guaranteed for 30 days from the date of production.

Film is suitable for printing after laying on a PRIMER. In case of laminating or printing – it is recommended to repeat the corona treatment too.

### Food Contact

Propafilm™ BH complies with the applicable EU legislation for most applications involving direct contact with foods. Full details are given on the Declaration of Compliance. Customers intending to use Propafilm™ BH in a food contact application should request a copy of this document from Innovia Films. Details of compliance with food contact legislation in non-EU countries are also available upon request.

### Health & Safety Guidelines

For Health & Safety information, please refer to Innovia Poland's Quality documents.

**Disclaimer:** Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

Propafilm™ BH - 2 of 2 - 0620

#### Regional Offices:

Europe (UK) Tel +44 16973 42281

Americas (USA) Tel +1 800 424 6273

Asia-Pacific (Aus) Tel +61 3 9303 0600

[www.innoviafilms.com](http://www.innoviafilms.com)

email: [packaging@innoviafilms.com](mailto:packaging@innoviafilms.com)

™ Trademark of Innovia Films

