


# Propafilm™ RHX

## Technical Data Sheet

**RHX - Heavy Duty Barrier Coated Film** Biaxially oriented polypropylene (BOPP) film coated on both sides with an aqueous dispersion of polyvinylidene chloride (PVdC) copolymer.

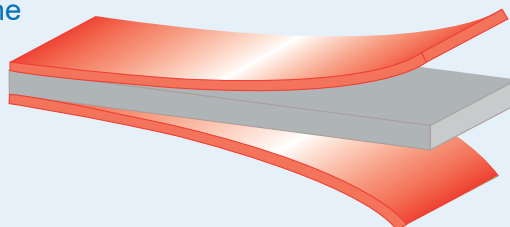

- PVdC Coating for Printability
- Oriented Polypropylene
- Enhanced Low Seal PVdC Coating

### Features

- Differentially PVdC coated to optimise superb printability with excellent sealability/machinability
- Puncture and impact-resistance properties are maintained even at low temperatures
- Excellent barrier to water vapour, gases and aromas
- Superior optical properties
- One side preferential print surface, one side wide seal surface
- Unaffected by variations in climatic conditions

### Applications

**RHX50(200)** is suitable for use as a single web replacement of laminate structures. Particularly suited to vertical form-fill-seal applications in the confectionery industry.

### Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	RHX
Thickness	Innovia Films test		micron	50
			gauge	200
Yield	Innovia Films test		m <sup>2</sup> /kg	20.1
			in <sup>2</sup> /lb	14150
			g/m <sup>2</sup>	49.8
Permeability to: Water vapour	ASTM F 1249	38°C 90% RH 100°F 90% RH	g/m <sup>2</sup> .24 hrs	2.9
			g/100in <sup>2</sup> . 24 hrs	0.21
Oxygen	ASTM F 1927	23°C 0% RH 73°F 0% RH	cc/m <sup>2</sup> .24 hrs	15
			cc/100in <sup>2</sup> . 24 hrs	1.10
Optical: Gloss	ASTM D 2457	45°	units	110
Haze (wide angle)	ASTM D 1003	2.5°	%	2
Coefficient of friction (film to film)	ASTM D 1894	Static/ Dynamic		0.20-0.30
				0.20-0.30
Sealing range	Innovia Films test	2 secs; 0.10MN/m <sup>2</sup> 2 secs; 15 psi	°C	95-145
			°F	200-295
Seal strength	Innovia Films test	130°C; 2 secs; 0.10MN/m <sup>2</sup> 265°F; 2 secs; 15 psi	g(f)/25mm/ in	>350
Shrinkage	Innovia Films test	60 secs at 120°C (250°F) 60 secs at 130°C (265°F)	% MD	4.0
			% TD	Nil
			% MD	7.0
			% TD	1.0

MD Machine Direction TD Transverse Direction

All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH, (73 ± 4F, 50 ± 5% RH), unless otherwise stated. Where relevant, tests are based on international testing standards.

Ref B320 - 1 of 2 - 0619

# Propafilm™ RHX

## Technical Data Sheet

### Reel Specifications

#### Nominal Reel Diameters



Film	Single Length (metres)	12x Length (metres)
RHX50	750	9000

Film	Single Length (feet)	12x Length (feet)
RHX200	2380	23800

Other reel lengths are available subject to negotiation.

Outside Diameter	1x	2x	4x	6x	8x	12x
For 77mm / 3in core	240mm 9½in	330mm 13in	450mm 18in	-	-	-
For 153mm / 6in core	-	-	475mm 18¾in	570mm 22½in	650mm 25½in	785mm 31in

The preferred print surface is available on either the inner or outer surface of Propafilm™ RHX. The print surface is indicated by a symbol on a label attached to each reel.

Treated Surface	Ordering Code	Label Symbol
Inside	I	 Printable side >>
Outside	O	 Printable side <<

### Film Storage and Handling

No special conditions are required for the storage of Propafilm™ RHX but it is recommended that dry conditions at temperatures below 30°C (85°F) are employed. Propafilm™ RHX is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use.

### Food Contact

Propafilm™ RHX complies with the applicable EU and US legislation for most applications involving direct contact with foods. Full details are given on the Declaration of Compliance. Customers intending to use Propafilm™ RHX in a food contact application should request a copy of this document from Innovia Films. Details of compliance with food contact legislation in non-EU countries are also available upon request.

### Health & Safety Guidelines

For Health & Safety information, please refer to literature reference B190.

**Disclaimer:** Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

Ref B320 - 2 of 2 - 0619

#### Regional Offices:

Europe (UK) Tel +44 16973 42281

Americas (USA) Tel +1 800 424 6273

Asia-Pacific (Aus) Tel +61 3 9303 0600

[www.innoviafilms.com](http://www.innoviafilms.com)

email: [packaging@innoviafilms.com](mailto:packaging@innoviafilms.com)

™ Trademark of Innovia Films

