


Propafilm™ RK+

Technical Datasheet

RK+ - Heat-Sealable Anti-Mist

Coated Film.

Biaxially oriented polypropylene (BOPP) film coated with two aqueous dispersions of polyvinylidene chloride (PVdC) copolymer.

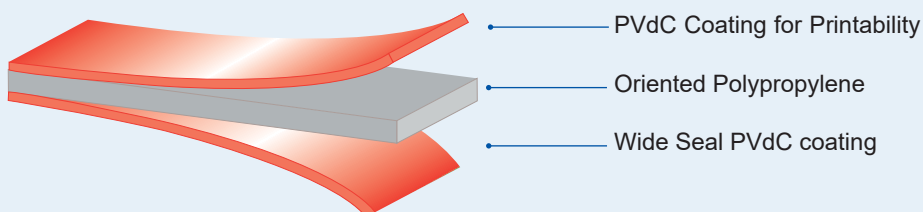

Features

- Excellent anti-mist properties for sandwich, salad and vegetable packaging
- Heat-sealable on both sides but with a very wide seal range on one side
- One side preferential print surface and receptive to adhesives
- Excellent barrier to water vapour, gases and aromas
- Strong tearing seals
- High gloss surface on both sides
- Unaffected by variations in climatic conditions

Applications

RK+21 is suitable for use as a single web or in laminate structures in the fresh foods industry.

RK+25/30/35/50 are recommended for use as a single web in the fresh produce and meat industry. Particularly suited for medium to large packs on form-fill-seal machines.

Markets

- Fresh produce
- Meat
- Sandwiches

Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	RK+				
				21	25	30	35	50
Thickness	Innovia Films test		micron	21	25	30	35	50
Yield	Innovia Films test		m ² /kg g/m ²	48.2 20.7	39.6 25.3	33.6 29.8	29.1 34.3	20.1 49.8
Permeability to: Water vapour	ASTM F 1249	23°C 85% RH 38°C 90% RH	g/m ² .24 hrs	0.8 5.5	0.7 5.0	0.7 4.5	0.6 4.0	0.3 3.0
Oxygen	ASTM F 1927	23°C 85% RH 25°C 0% RH	cc/m ² .24 hrs	15 15	15 15	15 15	15 15	15 15
Optical: Gloss	ASTM D 2457	45°	units	100-110				
Haze (wide angle)	ASTM D 1003	2.5°	%	2-3				
Coefficient of friction (film to film)	ASTM D 1894	Static/ Dynamic		0.20-0.30 0.20-0.30				
Sealing range	Innovia Films test	2 secs; 0.10 MN//m ²	°C	90-145				
Anti-Mist test	ICI	4°C		E				
Seal strength	Innovia Films test	130°C; 2 secs; 0.10 MN/m ²	g(f)/25mm	>400				
Shrinkage	Innovia Films test	60 secs at 120°C 60 secs at 130°C	% MD TD MD TD	4.0 Nil 7.0 4.0				

MD Machine Direction TD Transverse Direction

All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH, unless otherwise stated. Where relevant, tests are based on international testing standards.

B341 - 1 of 2 - Edition UK - 0519

Propafilm™ RK+

Technical Data Sheet

Reel Specifications



Nominal Reel Diameters

Film	Length/(metres)					
	1700	3400	6800	10200	13600	20400
RK+21	1700	3400	6800	10200	13600	20400
RK+25	1500	3000	6000	9000	12000	18000
RK+30	1250	2500	5000	7500	10000	15000
RK+35	1100	2200	4400	6600	8800	13200
RK+50	750	1500	3000	4500	6000	9000
Outside Diameter for 77mm core	240mm	330mm	450mm	-	-	-
Outside Diameter for 153mm core	-	-	475mm	570mm	650mm	785mm

Other reel lengths are available subject to negotiation.

Preferred Print Surface

The preferred print surface is available on either the inner or outer surface of Propafilm™ RK+. The print surface is indicated by a symbol on a label attached to each reel.

Treated Surface	Ordering Code	Label Symbol
Inside	I	
Outside	O	

Film Storage

No special conditions are required for the storage of Propafilm™ RK+ but it is recommended that dry conditions at temperatures below 30°C are employed. Propafilm™ RK+ is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use.

Food Contact

Propafilm™ RK+ complies with the applicable EU legislation for most applications involving direct contact with foods. Full details are given on the Declaration of Compliance. Customers intending to use Propafilm™ RK+ in a food contact application should request a copy of this document from Innovia Films. Propafilm™ RK+ does not comply with US legislation for applications involving direct contact with foods. Details of compliance with food contact legislation in other countries are also available upon request.

Health & Safety Guidelines

For Health & Safety information, please refer to literature reference B190.

Disclaimer: Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

B341 – 2 of 2 – Edition UK – 0519

Regional Offices:

Europe (UK) Tel +44 16973 42281

Americas (USA) Tel +1 800 424 6273

Asia-Pacific (Aus) Tel +61 3 9303 0600

www.innoviafilms.com

email: packaging@innoviafilms.com

™ Trademark of Innovia Films

