


# Propafilm™ ZNA

## Technical Data Sheet

**ZNA** - Standard, transparent, glossy, coextruded OPP film.

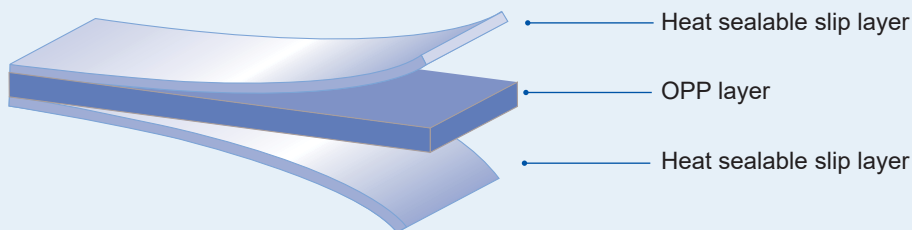

### Features

- Two-side heat seal capability
- Anti-blocking and anti-static properties
- Excellent tear strength and puncture resistance
- Oil and grease resistant
- Meets FDA approval for use in food packaging applications

### Applications

High speed wrapping of individual cigarette hard packs and cartons.



### Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	ZNA	
Thickness	ASTM D4 321		micron	16	20
			gauge	65	79
Basic Weight	ASTM D4 321		g/m <sup>2</sup>	15	18.2
			lbs/ream	9.2	11.2
Nominal Density	ASTM D4 321		g/cm <sup>3</sup>	0.91	0.91
Yield	ASTM D4 321		m <sup>2</sup> /kg	66.6	54.9
			in <sup>2</sup> /lb	46900	38700
Tensile strength	Innovia Films test	200mm/min	N/mm <sup>2</sup> MD	170	150
			N/mm <sup>2</sup> TD	290	300
			lbs/in <sup>2</sup> MD	24650	21750
			lbs/in <sup>2</sup> TD	42050	43500
			% MD	155	190
Elongation at Break	Innovia Films test	200mm/min	% TD	60	60
CoF	ASTM D 1894	Static / Dynamic		0.25	0.25
MVTR	Innovia Films test	38°C (100°F) 90% RH	g/m <sup>2</sup> /day	7.8	6
			g/100in <sup>2</sup> /day	0.50	0.39
Heat Seal Strength Back- Front	Innovia Films test	140°C/0.35/0.15 secs 284°F/0.5psi/0.15sec	N/15mm	1.5	1.8
			g/in	259	311
Heat Seal Range Back - Front	Innovia Films test	0.35N (0.5psi)/0.15secs	°C (min/max)	120-140	120-140
			°F (min/max)	248-284	248-284

MD Machine Direction TD Transverse Direction  
 All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH.(73 ± 4F, 50 ± 5% RH), unless otherwise stated. Where relevant, tests are based on international testing standards.  
 Ref B305 - 1 of 2 - 0320

# Propafilm™ ZNA

## Technical Data Sheet

### Reel Specifications

#### Nominal Reel Diameters

Film	1x Length (metres)	4/3x Length (metres)
ZXA16	4000	5333
ZXA20	3200	4267

Film	1x Length (feet)	4/3x Length (feet)
ZXA65	13123	17498
ZXA80	10499	13998

Outside Diameter	1x	4/3x
For 77mm 3in core	310mm 12.2in	353mm 13.9in

All reels are wound to length. Actual OD may vary with thickness and winding density variations.

### Film Storage and Handling

- This film is largely unaffected by climate influences, but it should be stored at temperatures below 38°C (100°F).
- The reels should be kept in their original wrapping until used. After the reels have been unwrapped, they should be stored upright with suitable protection for the edges.
- Innovia films should be placed in the processing area 24 hours prior to processing to acclimatise.
- Innovia films are largely unaffected by climatic conditions but should not be stored at temperatures above 40°C (104°F). Under suitable storage conditions the film can be stored for a period of six months without any risk of deterioration.

### Food Contact

FDA approved for direct food contact. Please contact Technical Services for individual “original” FDA Food Contact statements.

### Environmental Concerns

Polypropylene polymers are derived from petroleum and consist only of carbon and hydrogen atoms. Film is coextruded by a clean and simple method without using process chemicals. All waste generated during manufacture is collected and recycled as part of the production process. When efficiently incinerated, only carbon dioxide and water vapor are produced.

### Health & Safety Guidelines

MSDS sheets, as well as other product safety documents, are available for our films upon request.

**Disclaimer:** Innovia Films or any of its affiliated companies (hereinafter “Innovia Films”) declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films’ best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client’s specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

#### Regional Offices:

Europe (UK) Tel +44 16973 42281

Americas (USA) Tel +1 800 424 6273

Asia-Pacific (Aus) Tel +61 3 9303 0600

[www.innoviafilms.com](http://www.innoviafilms.com)

email: [tobacco@innoviafilms.com](mailto:tobacco@innoviafilms.com)

™ Trademark of Innovia Films

