


Rayoart™ WG

Technical Data Sheet

WG - White, High Gloss Biaxially Oriented Polypropylene Film with Enhanced UV Stability, for Graphic Art or Label Applications.

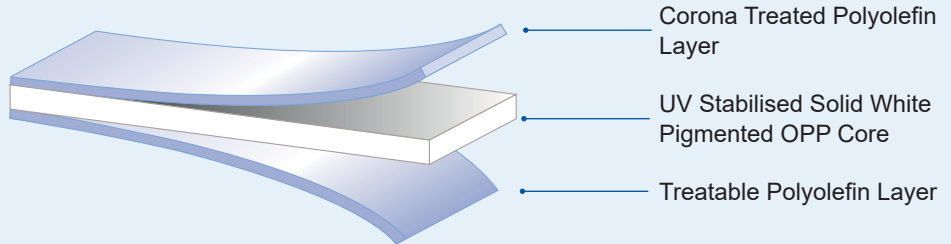


Features

- UV stabilised for outdoor applications
- High opacity
- Extremely easy to apply and remove at low and high temperatures
- High resistance to tearing during handling
- High stability during adhesive lamination and printing processes
- Balanced biaxial orientation for superior die cutting of decals and stickers
- Recyclable with polyolefin materials
- Excellent whiteness

Printability

Rayoart™ WG can be printed by traditional flexographic, gravure, silkscreen and letterpress processes. However, exact ink systems should be recommended by your supplier. Additional corona treatment is recommended for optimum performance.

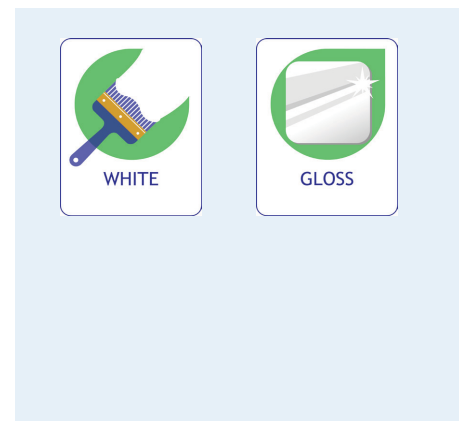

Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	WG	
Thickness	Innovia Films test		micron	90	
			gauge	360	
Yield	Innovia Films test		m ² /kg	11.3	
			in ² /lb	7900	
			g/m ²	88.5	
Optical opacity	Innovia Films test		%	85	
Tensile strength	ASTM D 882	Strain rate 50%/min	MN/m ²	MD	180
				TD	170
			kpsi	MD	26.1
				TD	24.6
Elongation at break	ASTM D 882	Strain rate 50%/min	%	MD	110
				TD	120
Elasticity modulus (1% secant)	ASTM D 882	Strain rate 10%/min	MN/m ²	MD	2000
				TD	1900
			kpsi	MD	290
				TD	276
Dimensional stability	Innovia Films test	70°C (158°F)/10min	%	MD	0.4
				TD	-0.3
Surface tension (corona treated surface)			Dyne/cm		>38
UV resistance	ASTM G53	50°C (122°F)	hours		>1000

MD Machine Direction TD Transverse Direction

All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH, (73 ± 4F, 50 ± 5% RH), unless otherwise stated. Where relevant, tests are based on international testing standards.

Rayoart™ WG - 1 of 2 - 0120



use our imagination...

Rayoart™ WG

Technical Data Sheet

Conversion

The balanced biaxial orientation of Rayoart™ WG allows high speed conversion during adhesive lamination and printing. The same feature provides excellent die cutting performance, enhancing film edge appearance and prolonging die life.

Reel Specifications

Nominal Reel Diameters

Film	Core Size/(mm)	Approx Outside Dia/(mm)	Length/(metres)
WG90	77	450	1600
	153	864	6000

Film	Core Size/(in)	Approx Outside Dia/(in)	Length/(feet)
WG360	3	17.7	5600
	6	34.0	19700

Corona treatment is available on either the inner or outer surface of Rayoart™ WG.

Film Storage and Handling

Care should be taken to protect reels of film from storage temperatures above 30°C (86°F) and localised sources of heat above 45°C (113°C). The reels should remain in the protective coverings supplied until ready for use on converting machinery. Converted reels, in both master and slit reel form should be similarly protected at all times. Rayoart™ WG is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use. For specific enquiries, please refer to our graphic arts market development department.

Food Contact

Rayoart™ WG complies with the applicable EU and US legislation for most applications involving direct contact with food. Details are given on the Declaration of Compliance. Customers intending to use Rayoart™ WG in a food contact application should request a copy of this document from Innovia Films.

Health & Safety Guidelines

For Health & Safety information, please refer to literature reference L190.

Disclaimer: Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

Rayoart™ WG – 2 of 2 – 0120

Regional Offices:

Europe (UK) Tel +44 16973 42281

Americas (USA) Tel +1 800 424 6273

Asia-Pacific (Aus) Tel +61 3 9303 0600

www.innoviafilms.com

email: labels@innoviafilms.com

™ Trademark of Innovia Films

