


Rayoface™ CDI

Technical Data Sheet

CDI - Clear, High Gloss, Top Coated Biaxially Oriented Polypropylene Film for Facestock Applications Requiring Indigo® ElectroInk™ Receptivity.

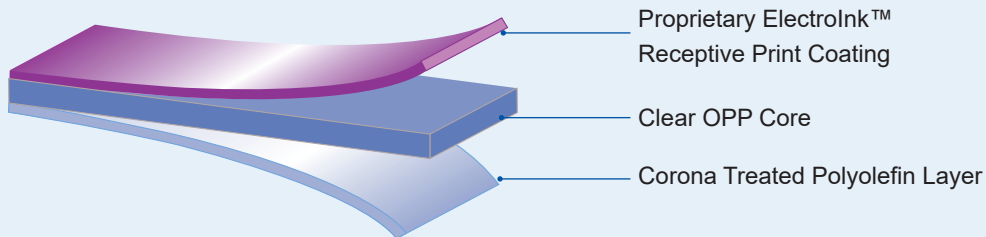


Features

- Dedicated superior print receptive top coating for excellent printability by Indigo® ElectroInk™ toner systems.
- Top coat fully certified by HP Indigo®.
- Approved for WS2000/4000/4050/4500/6000 presses
- Excellent clarity for 'no-label look'
- High gloss surface
- Excellent hot/cold moisture resistance
- Semi-squeeze performance
- High stiffness for conversion and automatic dispensing
- Balanced biaxial orientation for superior die cutting
- Recyclable with polyolefin materials

Printability

Rayoface™ CDI has a proprietary aqueous top coating specifically designed for receptivity of Indigo® liquid toners.

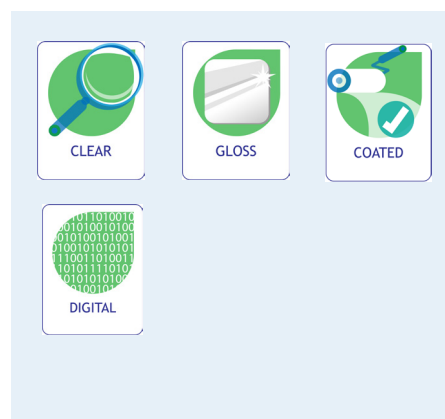

Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	CDI	
Thickness	Innovia Films test		micron	51	59
			gauge	200	230
Yield	Innovia Films test		m ² /kg	21.4	18.5
			in ² /lb	15000	13000
			g/m ²	46.7	54.0
Optical: Gloss Haze (wide angle)	ASTM D 2457 ASTM D 1003	45°	%	90	
		2.5°		<3.5	
Tensile strength	ASTM D 882	Strain rate 50%/min	MN/m ²	MD	200
				TD	180
			kpsi	MD	29.0
				TD	26.1
Elongation at break	ASTM D 882	Strain rate 50%/min	%	MD	105
				TD	120
Elasticity modulus (1% secant)	ASTM D 882	Strain rate 10%/min	MN/m ²	MD	2400
				TD	2200
			kpsi	MD	348
				TD	319
Dimensional stability	Innovia Films test	60 secs at 120°C (248°F)	%	MD	3.0
				TD	Nil
		60 secs at 130°C (266°F)	MD	6.0	
			TD	1.0	

MD Machine Direction TD Transverse Direction

All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH, (73 ± 4F, 50 ± 5% RH), unless otherwise stated. Where relevant, tests are based on international testing standards.

Rayoface™ CDI - 1 of 2 - 0121



use our imagination...

Rayoface™ CDI

Technical Data Sheet

Conversion

The balanced biaxial orientation of Rayoface™ CDI results in excellent die cutting performance, enhancing label edge appearance and prolonging die life. The high machine direction stiffness and tensile strength produces excellent matrix stripping and superior high speed label dispensing.

Reel Specifications

Nominal Reel Diameters

Film	Core Size/(mm)	Approx Outside Dia/(mm)	Length/(metres)
CDI51	153	490	3100
		813	9300
CDI59	153	520	3100
		871	9300

Film	Core Size/(in)	Approx Outside Dia/(in)	Length/(feet)
CDI200	3	19.5	10100
		32.0	30500
CDI230	3	20.7	10100
		34.3	30500

Alternative reel lengths/core sizes are available subject to negotiation.

The ElectroInk™ receptive coating is available on either the inner or outer surface of Rayoface™ CDI.

Film Storage and Handling

Care should be taken to protect reels of film from storage temperatures above 30°C (86°F) and localised sources of heat above 45°C (113°F). The reels should remain in the protective coverings supplied until ready for use on converting machinery. Converted reels, in both master and slit reel form should be similarly protected at all times. Rayoface™ CDI is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use.

Food Contact

For information on the food contact status of Rayoface™ CDI please contact our Technical Services department.

Health & Safety Guidelines

For Health & Safety information, please refer to literature reference L190.



Indigo® and ElectroInk™ are trademarks/registered trademarks of HP Indigo®.

Disclaimer: Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

Rayoface™ CDI – 2 of 2 – 0121

Regional Offices:

Europe (UK) Tel +44 16973 42281
Americas (USA) Tel +1 800 424 6273
Asia-Pacific (Aus) Tel +61 3 9303 0600

www.innoviafilms.com
email: labels@innoviafilms.com
™Trademark of Innovia Films

