


Rayoface™ JB

Technical Data Sheet

JB - High yield semi-solid, glossy white opaque BOPP film for label facestock applications.

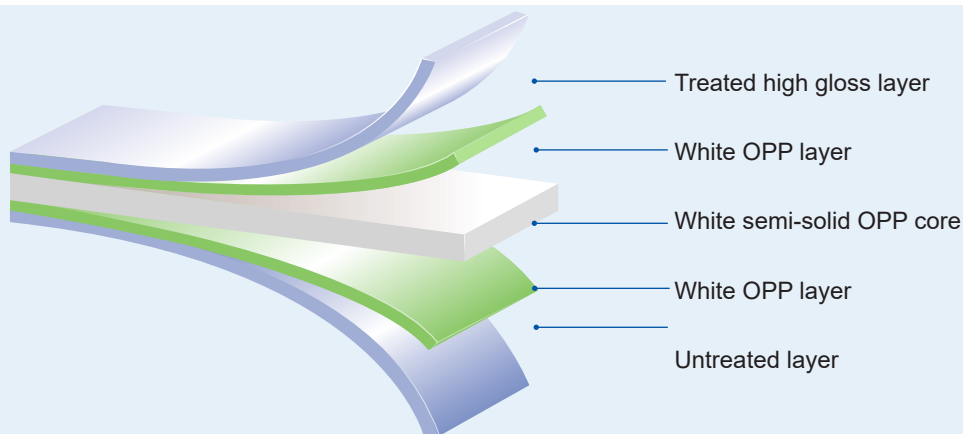

Features

- High yield semi-solid film
- High opacity
- Glossy white appearance
- Coating receptive surface
- Excellent web flatness for coating process

Application

- Label facestock film for pressure sensitive label applications



Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	JB	
Thickness	Innovia Films test		micron	47	
Yield	Innovia Films test		m ² /kg	25.6	
Basis Weight	Innovia Films test		g/m ²	39.0	
Opacity	Innovia Films test		%	88	
Whiteness	Innovia Films test		% (Berger)	87	
Surface Energy	ASTM D 2578	Outside	mN/m (dyne)	40	
Tensile Strength	ASTM D 882	Strain rate 50%/min	MN/m ²	MD TD	100 160
Elongation at break	ASTM D 882	Strain rate 50%/min	%	MD TD	192 32
Elasticity modulus (1% secant)	ASTM D 882	Strain rate 50%/min	Mpa	MD TD	1200 2100
Thermal Shrinkage	Innovia Films test	60 secs at 130°C	%	MD TD	2.8 1.0

MD Machine Direction TD Transverse Direction

All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH, unless otherwise stated. Where relevant, tests are based on international testing standards.

Rayoface™ JB - 1 of 2 - 0722

Rayoface™ JB

Technical Data Sheet

Conversion

Treatment and Winding	Surface Printing
One-side treated	Treatment properties are guaranteed for 6 months only
Treated surface wound to outside of reel	Excellent web flatness permits higher speed printing
Refer to reel tag for specific treatment on roll	Run appropriate trials prior to production
Untreated surface is treatable	Consult your ink, coating and adhesive suppliers

Conversion Note -

During conversion, web temperatures should not exceed a web temperature of (40°C).

Nominal Reel Diameters

Film	Core Size/(mm)	Approx Outside Dia/(mm)	Length/(metres)
JB47	153	900	12300

All reels are wound to length. Actual OD may vary with thickness and winding density variations.

Film Storage and Handling

The films should be placed in the processing area 24 hours prior to processing, to acclimatise. The films are largely unaffected by climatic conditions but should not be stored at temperatures above 104°F (40°C). Under suitable storage conditions, the film can be stored for a period of 6 months without any risk of deterioration.

Food Contact

Rayoface™ JB complies with the applicable EU & US legislation for most applications involving direct contact with foods. Full details are given on the Declaration of Compliance. Customers intending to use Rayoface™ JB in a food contact application should request a copy of this document from Innovia Films. Details of compliance with food contact legislation in non-EU countries are also available upon request.

Health & Safety Guidelines

MSDS sheets, as well as other product safety documents, are available for our films upon request.

Disclaimer: Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

Rayoface™ JB – 2 of 2 – 0722

Regional Offices:

Europe (UK) Tel +44 16973 42281
Americas (USA) Tel +1 800 424 6273
Asia-Pacific (Aus) Tel +61 3 9303 0600

www.innoviafilms.com
email: labels@innoviafilms.com
™Trademark of Innovia Films

