


Rayoface™ W

Technical Data Sheet

W - White, High Gloss Biaxially Oriented Polypropylene Film for Facestock Applications.

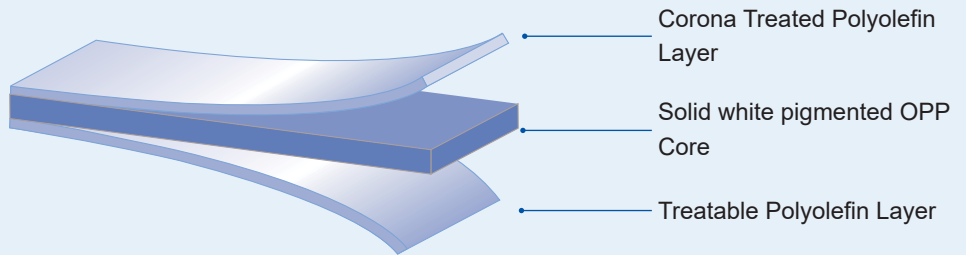


Features

- Corona treated print surface
- No migratory additives
- High opacity
- Excellent hot /cold moisture resistance
- Recyclable with polyolefin materials
- Semi-squeeze performance
- High stiffness for conversion and automatic dispensing
- Balanced biaxial orientation for superior die cutting
- High gloss surface
- Excellent whiteness

Printability

Rayoface™ W can be printed by traditional flexographic and gravure processes. However, exact ink systems should be recommended by your supplier. Additional in-line corona treatment is recommended for optimum performance.

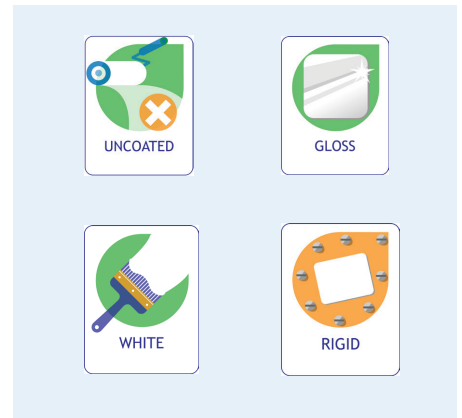

Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	W			
				28	49	50	58
Thickness	Innovia Films test		micron	28	49	50	58
			gauge	120	195	200	230
Yield	Innovia Films test		m ² /kg	36.4	20.6	20.2	17.6
			in ² /lb	24400	14500	14200	12400
			g/m ²	27.5	48.5	49.5	56.8
Optical; Opacity	Innovia Films test		%	62	80	80	80
Tensile strength	ASTM D 882	Strain rate 50%/min	MN/m ²		175		
			MD		155		
			kpsi		25.3		
			TD		22.5		
Elongation at break	ASTM D 882	Strain rate 50%/min	%		85		
			MD		110		
			TD				
Elasticity modulus (1% secant)	ASTM D 882	Strain rate 10%/min	MN/m ²		2400		
			MD		2100		
			kpsi		348		
			TD		304		
Dimensional stability	Innovia Films test	60 secs at 120°C (248°F)	%		3.0		
			MD		NIL		
		60 secs at 130°C (266°F)	TD		7.0		
			MD		1.0		
			TD				

MD Machine Direction TD Transverse Direction

All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH, (73 ± 4F, 50 ± 5% RH), unless otherwise stated. Where relevant, tests are based on international testing standards.

Rayoface™ W - 1 of 2 - 0120

Rayoface™ W

Technical Data Sheet

Conversion

The balanced biaxial orientation of Rayoface™ W results in excellent die cutting performance, enhancing label edge appearance and prolonging die life. The high machine direction stiffness and tensile strength produces excellent matrix stripping and superior high speed label dispensing.

Reel Specifications

Nominal Reel Diameters

Film	Core Size/(mm)	Approx Outside Dia/(mm)	Length/(metres)
W28	153	785	16200
W49	153	1109	18350
W50	153	913	12300
W58	153	870	9600

Film	Core Size/(in)	Approx Outside Dia/(in)	Length/(feet)
W120	6	31.0	53000
W195	6	43.7	60200
W200	6	35.9	40350
W230	6	34.3	31500

Alternative reel lengths/core sizes are available subject to negotiation.

The print coating is available on either the inner or outer surface of Rayoface™ W.

Film Storage and Handling

For the storage of Rayoface™ W it is recommended that dry conditions at temperatures below 30°C (86°F) are employed to minimise any deterioration of surface discharge treatment level. Rayoface™ W is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use.

Food Contact

Rayoface™ W complies with the applicable EU and US legislation for most applications involving direct contact with foods. Full details are given on the Declaration of Compliance. Customers intending to use Rayoface™ W in a food contact application should request a copy of this document from Innovia Films. Details of compliance with food contact legislation in non-EU countries are also available upon request.

Health & Safety Guidelines

For Health & Safety information, please refer to literature reference L190.

Disclaimer: Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

Rayoface™ W – 2 of 2 – 0120

Regional Offices:

Europe (UK) Tel +44 16973 42281

Americas (USA) Tel +1 800 424 6273

Asia-Pacific (Aus) Tel +61 3 9303 0600

www.innoviafilms.com

email: labels@innoviafilms.com

™ Trademark of Innovia Films

